

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B32B 27/36, 7/02, G02B 5/08, 5/30	A1	(11) International Publication Number: WO 97/01440 (43) International Publication Date: 16 January 1997 (16.01.97)
(21) International Application Number: PCT/US96/10691 (22) International Filing Date: 20 June 1996 (20.06.96) (30) Priority Data: 08/494,416 26 June 1995 (26.06.95) US (71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (72) Inventors: GILBERT, Laurence, R.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). JONZA, James, M.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). OUDERKIRK, Andrew, J.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). STOVER, Carl, A.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). WEBER, Michael, F.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (74) Agents: BUCKINGHAM, Stephen, W. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: MULTILAYER POLYMER FILM WITH ADDITIONAL COATINGS OR LAYERS (57) Abstract A multilayer polymer film has an optical stack including a plurality of alternating polymer layers with skin layers having mechanical, optical, or chemical properties differing from those of the layers in the optical stack.		

<i>FOR THE PURPOSES OF INFORMATION ONLY</i>					
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.					
AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
	Congo		Republic of Korea		SGP
	Cote d'Ivoire		Kazakhstan		SVN
	Dominican Republic		People's Republic of China		TJK
	Ecuador		Sri Lanka	SN	Senegal
EN	China	ER	Eritrea	SW	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	MH	Marshall Islands	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

<i>FOR THE PURPOSES OF INFORMATION ONLY</i>			
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.			
AM	Armenia	GB	United Kingdom
AT	Austria	GE	Georgia
AU	Australia	GN	Guinea
BB	Barbados	GR	Greece
BE	Belgium	HU	Hungary
BF	Burkina Faso	IE	Ireland
BG	Bulgaria	IT	Italy
BJ	Benin	JP	Japan
BR	Brazil	KE	Kenya
BY	Belarus	KG	Kyrgyzstan
CA	Canada	KP	Democratic People's Republic of Korea
CF	Central African Republic		
	Czechia		People's Republic of China
	Dominican Republic		Tajikistan
	Egypt		Taiwan
	El Salvador		Tanzania
	Equatorial Guinea		Thailand
	Estonia		Togo
	Fiji		Tunisia
	Finland		Turkey
	France		Ukraine
	Gabon		Uruguay
			USA
			Vietnam
			Zimbabwe

<i>FOR THE PURPOSES OF INFORMATION ONLY</i>			
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.			
AM	Armenia	GB	United Kingdom
AT	Austria	GE	Georgia
AU	Australia	GN	Guinea
BB	Barbados	GR	Greece
BE	Belgium	HU	Hungary
BF	Burkina Faso	IE	Ireland
BG	Bulgaria	IT	Italy
BJ	Benin	JP	Japan
BR	Brazil	KE	Kenya
BY	Belarus	KG	Kyrgyzstan
CA	Canada	KP	Democratic People's Republic of Korea
CF	Central African Republic		
	Chad		
	Czechia		
	Dominican Republic		
	Ecuador		
	El Salvador		
	Equatorial Guinea		
	Estonia		
	Fiji		
	Finland		
	France		
	Gabon		
	Germany		
	Ghana		
	Greece		
	Guatemala		
	Honduras		
	Hong Kong		
	Hungary		
	Iceland		
	India		
	Indonesia		
	Israel		
	Italy		
	Jamaica		
	Japan		
	Jordan		
	Kazakhstan		
	Kenya		
	Korea, Rep. of		
	Korea, Dem. People's Rep. of		
	Kuwait		
	Lao PDR		
	Latvia		
	Lebanon		
	Lesotho		
	Lithuania		
	Luxembourg		
	Macao		
	Madagascar		
	Malawi		
	Malaysia		
	Mali		
	Malta		
	Mexico		
	Moldova, Rep. of		
	Mongolia		
	Morocco		
	Mozambique		
	Netherlands		
	New Zealand		
	Nicaragua		
	Niger		
	Nigeria		
	North Macedonia		
	Oman		
	Pakistan		
	Panama		
	Paraguay		
	Peru		
	Poland		
	Portugal		
	Romania		
	Russian Federation		
	Saudi Arabia		
	Senegal		
	Sierra Leone		
	Slovakia		
	Slovenia		
	South Africa		
	Spain		
	Sri Lanka		
	Sweden		
	Switzerland		
	Taiwan		
	Tajikistan		
	Tanzania		
	Togo		
	Tonga		
	Trinidad and Tobago		
	Tunisia		
	Turkey		
	Ukraine		
	Uruguay		
	USA		
	Uzbekistan		
	Venezuela		
	Viet Nam		

MULTILAYER POLYMER FILM
WITH ADDITIONAL COATINGS OR LAYERS

5

Background of the Invention

Multilayer optical stacks are well-known for providing a wide variety of optical properties. Such multilayer stacks may act as reflective polarizers or mirrors, reflecting light of all polarizations. They may also function as wavelength selective reflectors such as "cold mirrors" that reflect visible light but transmit infrared or "hot mirrors" that transmit visible and reflect infrared. Examples of a wide variety of multilayer stacks that may be constructed are included in United States Patent Application 08/402,041 filed March 10, 1995.

A problem with multilayer stacks as known in the art is that the stacks themselves may not have all of the physical, chemical, or optical properties desired. Some way of otherwise supplying these desirable properties would therefore be useful.

Summary of the Invention

According to one embodiment of the invention a multilayer film has adhered to one or both of its major surfaces at least one additional layer selected for mechanical, chemical, or optical properties that differ from the properties of the materials of the layers of the optical stack.

According to another embodiment of the invention a multilayer film has adhered to one or both of its surfaces an additional layer that will protect the multilayer optical stack.

Brief Description of the Drawings

optical films of Examples 1 through 6,

Figure 9 shows a multilayer film of the invention having an additional layer adhered to one of its major surfaces;

Figure 10 shows a multilayer film according to the invention having additional layers adhered to both of its major surfaces; and

5 Figure 11 shows a multilayer film having one additional layer adhered to one of its major surfaces and two additional layers adhered to its other major surface.

Detailed Description

10

Multilayer Optical Film

The advantages, characteristics and manufacturing of multilayer optical films are most completely described in the above-mentioned copending and commonly-assigned US Patent Application 08/402,041, filed March 10, 1995, titled
15 OPTICAL FILM, which is incorporated herein by reference. The multilayer optical film is useful, for example, as highly efficient mirrors and/or polarizers. A relatively brief description of the properties and characteristics of the multilayer optical film is presented below followed by a description of illustrative embodiments of backlight systems using the multilayer optical film according to the present invention.

20 Multilayer optical films as used in conjunction with the present invention exhibit relatively low absorption of incident light, as well as high reflectivity for off-axis as well as normal light rays. These properties generally hold whether the films are used for pure reflection or reflective polarization of light. The unique properties and advantages of the multilayer optical film provides an
25 opportunity to design highly-efficient backlight systems which exhibit low absorption losses when compared to known backlight systems.

An exemplary multilayer optical film of the present invention as illustrated in Figures 1A and 1B includes a multilayer stack 10 having alternating layers of a material having a property of stress induced birefringence, such that the index of refraction (n) of the material is affected by the stretching process. Figure 1A shows an exemplary

multilayer stack before the stretching process in which both materials have the same index of refraction. Light ray 13 experiences relatively little change in index of refraction and passes through the stack. In Figure 1B, the same stack has been stretched, thus increasing the index of refraction of material 12. The difference in refractive index at each boundary between layers will cause part of ray 15 to be reflected. By stretching the multilayer stack over a range of uniaxial to biaxial orientation, a film is created with a range of reflectivities for differently oriented plane-polarized incident light. The multilayer stack can thus be made useful as reflective polarizers or mirrors.

10 Multilayer optical films constructed according to the present invention exhibit a Brewster angle (the angle at which reflectance goes to zero for light incident at any of the layer interfaces) which is very large or is nonexistent for the polymer layer interfaces. In contrast, known multilayer polymer films exhibit relatively small Brewster angles at layer interfaces, resulting in transmission of light and/or undesirable iridescence. The multilayer optical films according to the present invention, however, allow for the construction of mirrors and polarizers whose reflectivity for *p* polarized light decrease slowly with angle of incidence, are independent of angle of incidence, or increase with angle of incidence away from the normal. As a result, multilayer stacks having high reflectivity for both *s* and *p* polarized light over a wide bandwidth, and over a wide range of angles can be achieved.

Figure 2 shows two layers of a multilayer stack, and indicates the three dimensional indices of refraction for each layer. The indices of refraction for each layer are n_{1x} , n_{1y} , and n_{1z} for layer 102, and n_{2x} , n_{2y} , and n_{2z} for layer 104. The relationships between the indices of refraction in each film layer to each other and to those of the other layers in the film stack determine the reflectance behavior of the multilayer stack at any angle of incidence, from any azimuthal direction. The principles and design considerations described in U.S. Patent Application 08/402,041 can be used in a wide variety of circumstances and applications. The indices of refraction of the

layers in the multilayer stack can be manipulated and tailored to produce the desired optical properties.

Referring again to Figure 1B, the multilayer stack 10 can include tens, hundreds or thousands of layers, and each layer can be made from any of a number of different materials. The characteristics which determine the choice of materials for a particular stack depend upon the desired optical performance of the stack. The stack can contain as many materials as there are layers in the stack. For ease of manufacture, preferred optical thin film stacks contain only a few different materials.

The boundaries between the materials, or chemically identical materials with different physical properties, can be abrupt or gradual. Except for some simple cases with analytical solutions, analysis of the latter type of stratified media with continuously varying index is usually treated as a much larger number of thinner uniform layers having abrupt boundaries but with only a small change in properties between adjacent layers.

The preferred multilayer stack is comprised of low/high index pairs of film layers, wherein each low/high index pair of layers has a combined optical thickness of $1/2$ the center wavelength of the band it is designed to reflect. Stacks of such films are commonly referred to as quarterwave stacks. For multilayer optical films concerned with the visible and the near infrared wavelengths, a quarterwave stack design results in each of the layers in the multilayer stack having an average thickness of not more than 0.5 microns.

In those applications where reflective films (e.g. mirrors) are desired, the desired average transmission for light of each polarization and plane of incidence generally depends upon the intended use of the reflective film. One way to produce a multilayer mirror film is to biaxially stretch a multilayer stack. For a high efficiency reflective film, average transmission along each stretch direction at normal incidence over the visible spectrum (380-750 nm) is desirably less than 1 percent (reflectance greater than 99 percent), more preferably less than 0.1 percent (reflectance greater than 99.9 percent), and even more preferably less than 0.01 percent (reflectance greater than 99.99 percent).

(reflectance greater than 99 percent). The average transmission at 60 degrees from the normal from 380-750 nm is desirably less than 20 percent (reflectance greater than 80 percent), preferably less than 10 percent (reflectance greater than 90 percent), more preferably less than 5 percent (reflectance greater than 95 percent),
5 and even more preferably less than 2 percent (reflectance greater than 98 percent), and even more preferably less than 1 percent (reflectance greater than 99 percent).

In addition, asymmetric reflective films may be desirable for certain applications. In that case, average transmission along one stretch direction may be desirably less than, for example, 50 percent, while the average transmission along
10 the other stretch direction may be desirably less than, for example 20 percent, over a bandwidth of, for example, the visible spectrum (380-750 nm), or over the visible spectrum and into the near infrared (e.g., 380-850 nm).

Multilayer optical films can also be designed to operate as reflective polarizers. One way to produce a multilayer reflective polarizer is to uniaxially
15 stretch a multilayer stack. The resulting reflective polarizers have high reflectivity for light with its plane of polarization parallel to one axis (in the stretch direction) for a broad range of angles of incidence, and simultaneously have low reflectivity and high transmissivity for light with its plane of polarization parallel to the other axis (in the non-stretch direction) for a broad range of angles of incidence. By
20 controlling the three indices of refraction of each film, n_x , n_y and n_z , the desired polarizer behavior can be obtained.

For many applications, the ideal reflecting polarizer has high reflectance along one axis (the so-called extinction axis) and zero reflectance along the other (the so-called transmission axis), at all angles of incidence. For the
25 transmission axis of a polarizer, it is generally desirable to maximize transmission of light polarized in the direction of the transmission axis over the bandwidth of interest and also over the range of angles of interest.

The average transmission at normal incidence for a polarizer in the transmission axis (the so-called transmission axis) over the bandwidth of interest (380-750 nm) is desirably at least 50 percent, preferably at least 70 percent, more preferably at least 80 percent, and even more preferably at least 90 percent. The average

transmission at 60 degrees from the normal (measured along the transmission axis for p-polarized light) for a polarizer from 380-750 nm is desirably at least 50 percent, preferably at least 70 percent, more preferably at least 80 percent, and even more preferably at least 90 percent.

- 5 The average transmission for a multilayer reflective polarizer at normal incidence for light polarized in the direction of the extinction axis across the visible spectrum (380-750 nm for a bandwidth of 300 nm) is desirably at less than 50 percent, preferably less than 30 percent, more preferably less than 15 percent, and even more preferably less than 5 percent. The average transmission at 60
10 degrees from the normal (measured along the transmission axis for p-polarized light) for a polarizer for light polarized in the direction of the extinction axis from 380-750 nm is desirably less than 50 percent, preferably less than 30 percent, more preferably less than 15 percent, and even more preferably less than 5 percent.

- For certain applications, high reflectivity for p-polarized light with its
15 plane of polarization parallel to the transmission axis at off-normal angles are preferred. The average reflectivity for light polarized along the transmission axis should be more than 20 percent at an angle of at least 20 degrees from the normal.

- In addition, although reflective polarizing films and asymmetric reflective films are discussed separately herein, it should be understood that two or
20 more of such films could be provided to reflect substantially all light incident on them (provided they are properly oriented with respect to each other to do so). This construction is typically desired when the multilayer optical film is used as a reflector in a backlight system according to the present invention.

- If some reflectivity occurs along the transmission axis, the efficiency
25 of the polarizer at off-normal angles may be reduced. If the reflectivity along the transmission axis is different for various wavelengths, color may be introduced into the transmitted light. One way to measure the color is to determine the root mean square (RMS) value of the transmissivity at a selected angle or angles over the
 wavelength range of interest. The RMS value is calculated according to the equation
30

$$C_{RMS} = \frac{\int_{\lambda_1}^{\lambda_2} ((T - \bar{T})^2)^{1/2} d\lambda}{\bar{T}}$$

where the range λ_1 to λ_2 is the wavelength range, or bandwidth, of interest, T is the transmissivity along the transmission axis, and \bar{T} is the average transmissivity along the transmission axis in the wavelength range of interest. For applications where a low color polarizer is desirable, the percent RMS color should be less than 10 percent, preferably less than 8 percent, more preferably less than 3.5 percent, and even more preferably less than 2 percent at an angle of at least 30 degrees from the normal, preferably at least 45 degrees from the normal, and even more preferably at least 60 degrees from the normal.

10 Preferably, a reflective polarizer combines the desired percent RMS color along the transmission axis for the particular application with the desired amount of reflectivity along the extinction axis across the bandwidth of interest. For polarizers having a bandwidth in the visible range (400-700 nm, or a bandwidth of 300 nm), average transmission along the extinction axis at normal incidence is
 15 desirably less than 40 percent, more desirably less than 25 percent, preferably less than 15 percent, more preferably less than 5 percent and even more preferably less than 3 percent.

Materials Selection and Processing

20 With the design considerations described in the above mentioned US Patent Application 08/402,041, one of ordinary skill will readily appreciate that a wide variety of materials can be used to form multilayer reflective films or polarizers according to the invention when processed under conditions selected to yield the desired refractive index relationships. The desired refractive index relationships can
 25 be achieved in a variety of ways, including stretching during or after film formation. For example, the materials can be selected so that they have similar rheological properties (e.g., melt viscosities) such that they can be co-extruded.

Specific examples of suitable materials include polyethylene naphthalate (PEN) and isomers thereof (e.g., 2,6-, 1,4-, 1,5-, 2,7-, and 2,3-PEN), polyalkylene terephthalates (e.g., polyethylene terephthalate, polybutylene terephthalate, and poly-1,4-cyclohexanedimethylene terephthalate), polyimides (e.g., polyacrylic imides), polyetherimides, atactic polystyrene, polycarbonates, polymethacrylates (e.g., polyisobutyl methacrylate, polypropylmethacrylate, polyethylmethacrylate, and polymethylmethacrylate), polyacrylates (e.g., polybutylacrylate and polymethylacrylate), syndiotactic polystyrene (sPS), syndiotactic poly-alpha-methyl styrene, syndiotactic polydichlorostyrene, copolymers and blends of any of these polystyrenes, cellulose derivatives (e.g., ethyl cellulose, cellulose acetate, cellulose propionate, cellulose acetate butyrate, and cellulose nitrate), polyalkylene polymers (e.g., polyethylene, polypropylene, polybutylene, polyisobutylene, and poly(4-methyl)pentene), fluorinated polymers (e.g., perfluoroalkoxy resins, polytetrafluoroethylene, fluorinated ethylene-propylene copolymers, polyvinylidene fluoride, and polychlorotrifluoroethylene), chlorinated polymers (e.g., polyvinylidene chloride, polyvinylchloride, and polytrichloroethylene), polyether sulfone, polyether ether ketone, polyimide, polyamide, silicone resins, epoxy resins, polyvinylacetate, polyether-amides, ionomeric resins, elastomers (e.g., polybutadiene, polyisoprene, and neoprene), and

polyurethanes. Also suitable are copolymers, e.g., copolymers of PEN (e.g., copolymers of 2,6-, 1,4-, 1,5-, 2,7-, and/or 2,3-naphthalene dicarboxylic acid, or esters thereof, with (a) terephthalic acid, or esters thereof; (b) isophthalic acid, or esters thereof; (c) phthalic acid, or esters thereof; (d) alkane glycols; (e) cycloalkane glycols (e.g., cyclohexane dimethane diol); (f) alkane dicarboxylic acids; and/or (g) cycloalkane dicarboxylic acids (e.g., cyclohexane dicarboxylic acid)), copolymers of polyalkylene terephthalates (e.g., copolymers of terephthalic acid, or esters thereof, with (a) naphthalene dicarboxylic acid, or esters thereof; (b) isophthalic acid, or esters thereof; (c) phthalic acid, or esters thereof; (d) alkane glycols; (e) cycloalkane glycols (e.g., cyclohexane dimethane diol); (f) alkane dicarboxylic acids; and/or (g) cycloalkane dicarboxylic acids (e.g., cyclohexane dicarboxylic acid)), and styrene copolymers (e.g., styrene-butadiene copolymers and styrene-acrylonitrile copolymers), 4,4'-bibenzoic acid and ethylene glycol. In addition, each individual layer may include blends of two or more of the above-described polymers or copolymers (e.g., blends of sPS and atactic polystyrene). The coPEN described may also be a blend of pellets where at least one component is a polymer based on naphthalene dicarboxylic acid and other components are other polyesters or polycarbonates, such as a PET, a PEN or a coPEN.

Particularly preferred combinations of layers in the case of polarizers include PEN/coPEN, polyethylene terephthalate (PET)/coPEN, PEN/sPS, PET/sPS, PEN/Estar, and PET/Estar, where "coPEN" refers to a copolymer or blend based upon naphthalene dicarboxylic acid (as described above) and Estar is polycyclohexanedimethylene terephthalate commercially available from Eastman Chemical Co.

Particularly preferred combinations of layers in the case of reflective films include PET/Ecdel, PEN/Ecdel, PEN/sPS, PEN/THV, PEN/co-PET, and PET/sPS, where "co-PET" refers to a copolymer or blend based upon terephthalic acid and ethylene glycol. The THV is a trademark of DuPont, and Ecdel is a trademark of Eastman Chemical Company. The sPS is a trademark of Minnesota Mining and Manufacturing Company, St. Paul, Minnesota.

The number of layers in the film is selected to achieve the desired optical properties using the minimum number of layers for reasons of film thickness, flexibility and economy. In the case of both polarizers and reflective films, the number of layers is preferably less than 10,000, more preferably less than 5,000, and even more preferably less than 2,000.

As discussed above, the ability to achieve the desired relationships among the various indices of refraction (and thus the optical properties of the multilayer film) is influenced by the processing conditions used to prepare the multilayer film. In the case of organic polymers which can be oriented by stretching, the films are generally prepared by co-extruding the individual polymers to form a multilayer film and then orienting the film by stretching at a selected temperature, optionally followed by heat-setting at a selected temperature. Alternatively, the extrusion and orientation steps may be performed simultaneously. In the case of polarizers, the film is stretched substantially in one direction (uniaxial orientation), while in the case of reflective films the film is stretched substantially in two directions (biaxial orientation).

The film may be allowed to dimensionally relax in the cross-stretch direction from the natural reduction in cross-stretch (equal to the square root of the stretch ratio); it may simply be constrained to limit any substantial change in cross-stretch dimension; or it may be actively stretched in the cross-stretch dimension. The film may be stretched in the machine direction, as with a length orienter, or in width using a tenter.

The pre-stretch temperature, stretch temperature, stretch rate, stretch ratio, heat set temperature, heat set time, heat set relaxation, and cross-stretch relaxation are selected to yield a multilayer film having the desired refractive index relationship. These variables are interdependent; thus, for example, a relatively low stretch rate could be used if coupled with, e.g., a relatively low pre-stretch temperature, a high stretch temperature, a high heat set temperature, an appropriate orientation time, etc. In general, however, a stretch ratio in the range from 1.2 to 1.10 (more preferably 1.2

to 1:7) in the stretch direction and from 1:0.2 to 1:10 (more preferably from 1:0.2 to 1:7) orthogonal to the stretch direction is preferred.

Suitable multilayer films may also be prepared using techniques such as spin coating (e.g., as described in Boese et al., J. Polym. Sci.: Part B, 30:1321 (1992) for birefringent polyimides, and vacuum deposition (e.g., as described by Zang et. al., Appl. Phys. Letters, 59:823 (1991) for crystalline organic compounds; the latter technique is particularly useful for certain combinations of crystalline organic compounds and inorganic materials.

Exemplary multilayer reflective mirror films and multilayer reflective polarizers will now be described in the following examples.

Example 1

PEN:THV 500, 449, Mirror)

A coextruded film containing 449 layers was made by extruding the cast web in one operation and later orienting the film in a laboratory film-stretching apparatus. A Polyethylene naphthalate (PEN) with an Intrinsic Viscosity of 0.53 dl/g (60 weight percent phenol/40 weight percent dichlorobenzene) was delivered by one extruder at a rate of 56 pounds per hour and THV 500 (a fluoropolymer available from Minnesota Mining and Manufacturing Company) was delivered by another extruder at a rate of 11 pounds per hour. The PEN was on the skin layers and 50 percent of the PEN was present in the two skin layers. The feedblock method was used to generate 57 layers which was passed through three multipliers producing an extrudate of 449 layers. The cast web was 20 mils thick and 12 inches wide. The web was later biaxially oriented using a laboratory stretching device that uses a pantograph to grip a square section of film and simultaneously stretch it in both directions at a uniform rate. A 7.46 cm square of web was loaded into the stretcher at about 100 degrees C and heated to 140 degrees C. The sample was then stretched to a final dimension of 10.0 cm in both the horizontal and vertical dimensions. After the stretching the sample was cooled by blowing room temperature air at it

Figure 3 shows the transmission of this multilayer film. Curve (a) shows the response at normal incidence for light polarized in the transmission direction, while curve (b) shows the response at 60 degrees for p-polarized light polarized in the transmission direction.

5

Example 2

(PEN:PMMA, 60/1, Mirror)

A coextruded film containing 60/1 layers was made on a sequential flat-film-making line via a coextrusion process. Polyethylene Naphthalate (PEN) with an Intrinsic Viscosity of 0.57 dl/g (60 weight percent phenol/40 weight percent dichlorobenzene) was delivered by extruder A at a rate of 114 pounds per hour with 64 pounds per hour going to the feedblock and the rest going to skin layers described below. PMMA (CP-82 from ICI of Americas) was delivered by extruder B at a rate of 61 pounds per hour with all of it going to the feedblock. PEN was on the skin layers of the feedblock. The feedblock method was used to generate 151 layers using the feedblock such as those described in US Patent 3,801,429, after the feedblock two symmetric skin layers were coextruded using extruder C metering about 30 pounds per hour of the same type of PEN delivered by extruder A. This extrudate passed through two multipliers producing an extrudate of about 601 layers. US Patent 3,565,985 describes similar coextrusion multipliers. The extrudate passed through another device that coextruded skin layers at a total rate of 50 pounds per hour of PEN from extruder A. The web was length oriented to a draw ratio of about 3.2 with the web temperature at about 280 degrees F. The film was subsequently preheated to about 310 degrees F in about 38 seconds and drawn in the transverse direction to a draw ratio of about 4.5 at a rate of about 11 percent per second. The film was then heat-set at 440 degrees F with no relaxation allowed. The finished film thickness was about 3 mil.

amount of optical absorption is difficult to measure because of its low value, but is less than 1 percent. At an incidence angle of 50 percent from the normal both s

(curve (b)) and p-polarized (curve (c)) light showed similar extinctions, and the bands were shifted to shorter wavelengths as expected. The red band-edge for s-polarized light is not shifted to the blue as much as for p-polarized light due to the expected larger bandwidth for s-polarized light, and due to the lower index seen by the p-polarized light in the PEN layers.

EXAMPLE 3

(PEN:PCTG, 449, Polarizer)

A coextruded film containing 481 layers was made by extruding the cast web in one operation and later orienting the film in a laboratory film-stretching apparatus. The feedblock method was used with a 61 layer feedblock and three (2x) multipliers. Thick skin layers were added between the final multiplier and the die. Polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.47 dl/g (60 weight percent phenol/40 weight percent dichlorobenzene) was delivered to the feedblock by one extruder at a rate of 25.0 pounds per hour. Glycol modified polyethylene dimethyl cyclohexane terephthalate (PCTG 5445 from Eastman) was delivered by another extruder at a rate of 25.0 pounds per hour. Another stream of PEN from the above extruder was added as skin layers after the multipliers at a rate of 25.0 pounds per hour. The cast web was 0.007 inches thick and 12 inches wide. The web was layer uniaxially oriented using a laboratory stretching device that uses a pantograph to grip a section of film and stretch it in one direction at a uniform rate while it is allowed to freely relax in the other direction. The sample of web loaded was about 5.40 cm wide (the unconstrained direction) and 7.45 cm long between the grippers of the pantograph. The web was loaded into the stretcher at about 100 degrees C and heated to 135 degrees C for 45 seconds. Stretching was then commenced at 20 percent/second (based on original dimensions) until the sample was stretched to about 6:1 (based on gripper to gripper measurements).

Figure 2 shows the transmission of this multilayer film where curve a shows transmission of light polarized in the non-stretch direction at normal

Figure 3 shows the transmission of this multilayer film where curve a shows transmission of light polarized in the non-stretch direction at normal

incidence, curve b shows transmission of p-polarized light polarized in the non-stretched direction at 60 degree incidence, and curve c shows the transmission of light polarized in the stretch direction at normal incidence. Average transmission for curve a from 400-700 nm is 89.7 percent, average transmission for curve b from 400-700 nm is 96.9 percent, and average transmission for curve c from 400-700 nm is 4.0 percent. Percent RMS color for curve a is 1.05 percent, and percent RMS color for curve b is 1.44 percent.

EXAMPLE 4

10 (PEN:CoPEN, 601, Polarizer)

A coextruded film containing 601 layers was made on a sequential flat-film-making line via a coextrusion process. A Polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.54 dl/g (60 weight percent Phenol plus 40 weight percent dichlorobenzene) was delivered by one extruder at a rate of 75 pounds per hour and the coPEN was delivered by another extruder at 65 pounds per hour. The coPEN was a copolymer of 70 mole percent 2,6 naphthalene dicarboxylate methyl ester, 15 percent dimethyl isophthalate and 15 percent dimethyl terephthalate with ethylene glycol. The feedblock method was used to generate 151 layers. The feedblock was designed to produce a stack of films having a thickness gradient from top to bottom, with a thickness ratio of 1.22 from the thinnest layers to the thickest layers. The PEN skin layers were coextruded on the outside of the optical stack with a total thickness of 8 percent of the coextruded layers. The optical stack was multiplied by two sequential multipliers. The nominal multiplication ratio of the multipliers were 1.2 and 1.27, respectively. The film was subsequently preheated to 310 degree F in about 40 seconds and drawn in the transverse direction to a draw ratio of about 5.0 at a rate of 6 percent per second. The finished film thickness was about 2 mils.

incidence, curve b shows transmission of p-polarized light at 60 degree incidence, and curve c shows transmission of light polarized in the stretch direction at normal

incidence. Note the very high transmission of p-polarized light in the non-stretch direction at both normal and 60 degree incidence (80-100 percent). Also note the very high reflectance of light polarized in the stretched direction in the visible range (400-700 nm) shown by curve c. Reflectance is nearly 100 percent between 500 and 650 nm.

EXAMPLE 5

(PEN:sPS, 481, Polarizer)

A 481 layer multilayer film was made from a polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.56 dl/g measured in 60 weight percent phenol and 40 weight percent dichlorobenzene purchased from Eastman Chemicals and a syndiotactic polystyrene (sPS) homopolymer (weight average molecular weight = 200,000 Daltons, sampled from Dow Corporation). The PEN was on the outer layers and was extruded at 26 pounds per hour and the sPS at 23 pounds per hour. The feedblock used produced 61 layers with each of the 61 being approximately the same thickness. After the feedblock three (2x) multipliers were used. Equal thickness skin layers containing the same PEN fed to the feedblock were added after the final multiplier at a total rate of 22 pounds per hour. The web was extruded through a 12 inch wide die to a thickness of about 0.011 inches (0.276 mm). The extrusion temperature was 290 degrees C.

This web was stored at ambient conditions for nine days and then uniaxially oriented on a tenter. The film was preheated to about 320 degrees F (160 degrees C) in about 25 seconds and drawn in the transverse direction to a draw ratio of about 6:1 at a rate of about 28 percent per second. No relaxation was allowed in the stretched direction. The finished film thickness was about 0.0018 inches (0.046 mm).

Figure 7 shows the optical performance of this PEN:sPS reflective

p-polarized light at 60 degree incidence, and curve c shows transmission of light polarized in the stretch direction at normal incidence. Note the very high

transmission of p-polarized light at both normal and 60 degree incidence. Average transmission for curve a over 400-700 nm is 86.2 percent, the average transmission for curve b over 400-700 nm is 79.7 percent. Also note the very high reflectance of light polarized in the stretched direction in the visible range (400-700 nm) shown by curve c. The film has an average transmission of 1.6 percent for curve c between 400 and 700 nm. The percent RMS color for curve a is 3.2 percent, while the percent RMS color for curve b is 18.2 percent.

10

EXAMPLE 6

(PEN:CoPEN, 603, Polarizer)

A reflecting polarizer comprising 603 layers was made on a sequential flat-film making line via a coextrusion process. A polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.47 dl/g (in 60 weight percent phenol plus 40 weight percent dichlorobenzene) was delivered by an extruder at a rate of 83 pounds (38 kg) per hour and the CoPEN was delivered by another extruder at 75 pounds (34 kg) per hour. The CoPEN was a copolymer of 70 mole percent, 2,6 naphthalene dicarboxylate methyl ester, 15 mole percent dimethyl terephthalate, and 15 mole percent dimethyl isophthalate with ethylene glycol. The feedblock method was used to generate 151 layers. The feedblock was designed to produce a stack of films having a thickness gradient from top to bottom, with a thickness ratio of 1.22 from the thinnest layers to the thickest layers. This optical stack was multiplied by two sequential multipliers. The nominal multiplication ratio of the multipliers was 1.2 and 1.4, respectively. Between the final multiplier and the die, skin layers were added composed of the same CoPEN described above, delivered by a third extruder at a total rate of 106 pounds (48 kg) per hour. The film was subsequently preheated to 300 degrees F (150 degrees C) in about 30 seconds and drawn in the transverse direction to a draw ratio of approximately 6 at

25

approximately 1.22 from the thinnest layers to the thickest layers.

Figure 8 shows the optical performance of the polarizer of Example 6. Curve a shows transmission of light polarized in the non-stretch direction at

normal incidence, curve b shows transmission of p-polarized light in the nonstretch direction at 50 degree angle of incidence, and curve c shows transmission of light polarized in the stretch direction at normal incidence. Note the very high transmission of light polarized in the non-stretch direction. Average transmission for curve a over 400-700 nm is 87 percent. Also note the very high reflectance of light polarized in the stretched direction in the visible range (400-700 nm) shown by curve b. The film has an average transmission of 2.5 percent for curve b between 400 and 700 nm. In addition, the percent RMS color of this polarizer is very low. The percent RMS color for curve b is 5 percent.

10

While the multilayer optical stacks, as described above, can provide significant and desirable optical properties, other properties, which may be mechanical, optical, or chemical, are difficult to provide in the optical stack itself without degrading the performance of the optical stack. Such properties may be provided by including one or more layers with the optical stack that provide these properties while not contributing to the primary optical function of the optical stack itself. Since these layers are typically provided on the major surfaces of the optical stack, they are often known as "skin layers."

A skin layer may be coextruded on one or both major surfaces of the multilayer stack during its manufacture to protect the multilayer stack from the high shear along the feedblock and die walls, and often an outer layer with the desired chemical or physical properties can be obtained by mixing an additive, such as, for example, a UV stabilizer, into the polymer melt that makes up the skin layer, and coextruding the skin layer with altered properties onto one or both sides of the multilayer optical stack during manufacture. Alternately, additional layers may be coextruded on the outside of the skin layers during manufacture of the multilayer film; they may be coated onto the multilayer film in a separate coating operation; or polycarbonate, metal, or glass. Adhesives useful for laminating the multilayer polymer film to another surface include both optically clear and diffuse adhesives

and include both pressure sensitive and non-pressure sensitive adhesives. Pressure sensitive adhesives are normally tacky at room temperature and can be adhered to a surface by application of, at most, light finger pressure, while non-pressure sensitive adhesives include solvent, heat, or radiation activated adhesive systems. Examples of adhesives useful in the present invention include those based on general compositions of polyacrylate; polyvinyl ether; diene-containing rubber such as natural rubber, polyisoprene, and polyisobutylene; polychloroprene; butyl rubber; butadiene-acrylonitrile polymer; thermoplastic elastomer; block copolymers such as styrene-isoprene and styrene-isoprene-styrene block copolymers, ethylene-propylene-diene polymers, and styrene-butadiene polymer; poly- α -olefin; amorphous polyolefin; silicone; ethylene-containing copolymer such as ethylene vinyl acetate, ethylacrylate, and ethyl methacrylate; polyurethane; polyamide; epoxy; polyvinylpyrrolidone and vinylpyrrolidone copolymers; polyesters; and mixtures of the above. Additionally, the adhesives can contain additives such as tackifiers, plasticizers, fillers, antioxidants, stabilizers, pigments, diffusing particles, curatives, biocides, and solvents. Preferred adhesives useful in the present invention include VITEL 3300, a hot melt adhesive available from Shell Chemical Co. (Akron, OH), or an acrylic pressure sensitive adhesive such as a 90/10 IOA/AA acrylic adhesive from Minnesota Mining and Manufacturing Company, St. Paul, Minnesota. When a laminating adhesive is used to adhere the multilayer film to another surface, the adhesive composition and thickness are preferably selected so as not to interfere with the optical properties of the multilayer stack. For example, when laminating additional layers to a multilayer polymer polarizer or mirror wherein a high degree of transmission is desired, the laminating adhesive should be optically clear in the wavelength region that the polarizer or mirror is designed to be transparent.

Figures 10 and 11 illustrate multilayer stacks having respectively one and two additional layers, respectively. Figures 10 and 11 will be used below to illustrate the present invention. The present invention is particularly applicable to uniaxially oriented multilayer optical stacks, such as reflective polarizers. Such stacks often tend to show a low tear resistance in the

principal draw direction. This can lead to reduced yields during the manufacturing process or to subsequent breakage of the film during handling. In order to resist this, tear resistant layers may be adhered to the outer major surfaces of the optical stack. These tough layers may be of any appropriate material and could even be the same as one of the materials used in the optical stack. Factors to be considered in selecting a material for a tear resistant layer include percent elongation to break, Young's modulus, tear strength, adhesion to interior layers, percent transmittance and absorbance in an electromagnetic bandwidth of interest, optical clarity or haze, refractive indices as a function of frequency, texture and roughness, melt thermal stability, molecular weight distribution, melt rheology and coextrudability, miscibility and rate of inter-diffusion between materials in the tough and optical layers, viscoelastic response, relaxation and crystallization behavior under draw conditions, thermal stability at use temperatures, weatherability, ability to adhere to coatings and permeability to various gases and solvents. Of course, as previously stated, it is important that the material chosen not have optical properties deleterious to those of the optical stack. They may be applied during the manufacturing process or later coated onto or laminated to the optical stack. Adhering these layers to the optical stack during the manufacturing process, such as by a coextrusion process, provides the advantage that the optical stack is protected during the manufacturing process.

Using Figure 10 to illustrate this aspect of the invention, a multilayer optical stack having tear resistant layers 400 is shown. Film 400 includes an optical stack 410. Optical stack 410 includes alternating layers 412 and 414 of two polymers having differing optical properties. Attached to the major surfaces of optical stack 410 are tear resistant layers 416 and 418. It should be noted that, although layers 416 and 418 are shown in Figure 10 as thicker than layers 412 and 414, Figure 10 is not to scale for a generally preferred embodiment. In general it is desirable that the tear resistant layers 416 and 418 have a thickness in the range of 5 percent to 60 percent of the thickness of the optical stack to provide tear resistance without unnecessarily increasing the amount

of material used. Thus, if the optical stack has 600 layers, in such a preferred embodiment the thickness of each of tear resistant layers 416 and 418 would be equal to the thickness of 30 to 360 of the layers of the stack. In a more preferred embodiment each of the tear resistant layers 416 and 418 would have a thickness in the range of 30 percent to 50 percent of that of the optical stack.

In a particularly desirable embodiment, tear resistant outer layers may be of one of the same materials used in alternating layers 412 and 414. In particular, it has been discovered that in a reflective polarizer comprising alternating layers of PEN and coPEN, tear resistant outer layers of coPEN may be coextruded during the manufacturing process.

Example 7

A multilayered composite of alternating PEN and coPEN layers to form a reflective polarizer was coextruded with thick skin layers of coPEN to form a tear resistant reflective polarizer. A coextruded film containing 603 layers was made on a sequential flat-film extruder. A polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.47 dl/g (in 60 weight percent phenol plus 40 weight percent dichlorobenzene) was delivered by an extruder at a rate of 86 pounds per hour and the coPEN was delivered by another extruder at 78 pounds per hour. The coPEN was a copolymer of 70 mole percent, 2,6 naphthalene dicarboxylate methyl ester and 30 percent dimethyl terephthalate with ethylene glycol. The feedblock extruded 151 layers. The feedblock was designed to produce a stack of films having a thickness gradient from top to bottom, with a thickness ratio of 1.22 from the thinnest layers to the thickest layers. This optical stack was multiplied by two sequential multipliers. The nominal multiplication ratio of the multipliers was 1.2 and 1.27, respectively. Between the final multipliers and the die, composed of coPEN as described above, layers were added. These layers were charged and

seconds and drawn in the transverse direction to a draw ratio of approximately 6 at an initial rate of about 20 percent per second. The finished film had a thickness of

approximately 100 μm including an inner multilayered optical stack of about 50 μm thickness and two exterior outer layers (one on each side of the film) of about 25 μm thickness, each. Tear resistance improved over the case without skins allowing the creation of wound rolls of tough reflective polarizer. Specifically, tear resistance was measured on films made according to this example and on film made under similar conditions but without coPEN skin layers using a trouser tear test along the principal draw direction, according to ASTM D-1938. Average film thicknesses were 100 μm and 48 μm , respectively. The average tear force values were 60.2 and 2.9 grams force, with standard deviations of 4.44 and 0.57 grams force, respectively. Analysis of the coPEN skin layers showed low orientation with indices of refraction of 1.63, 1.62, and 1.61 at 633 nm. Good interlayer adhesion was demonstrated by the difficulty of cleanly separating the construction. For further comparison a 48 μm optical stack having 3.8 μm outer layers of PEN was tested and found to have an average tear force of 2.8 grams with a standard deviation of 1.07.

The appearance and/or performance of a film may be altered by including a skin layer having a dye or pigment that absorbs in one or more selected regions of the spectrum. This can include portions or all of the visible spectrum as well as ultraviolet and infrared. Of course, if all of the visible spectrum is absorbed, the layer will be opaque. These can be selected in order to change the apparent color of light transmitted or reflected by the film. They can also be used to compliment the properties of the film, particularly where the film transmits some frequencies while reflecting others. The use of an UV absorptive material in a cover layer is particularly desirable because it may be used to protect the inner layers that may be unstable when exposed to UV radiation. Thus, Figure 9 illustrates such a film with layer 316 representing a layer containing an electromagnetic absorbing material.

Fluorescent materials absorb electromagnetic energy in the ultraviolet region of the spectrum and reemit in the visible. Desirable of layers 416 and 418 of Figure 9. Fluorescent materials absorb electromagnetic energy in the ultraviolet region of the spectrum and reemit in the visible. Desirable

fluorescent materials include hindered amine light stabilizers (HALS) and are described in more detail in United States Patent Application 08/345,608, filed November 28, 1994, the disclosure of which is incorporated herein by reference.

Pressure sensitive adhesives form another desirable class of materials that may be applied to a multilayer stack as layer 316 of Figure 9 or one of layers 416 or 418 of Figure 10. Generally pressure sensitive adhesives may be applied when the optical stack is intended for later lamination to another material, such as a glass or metal substrate.

Another material that could be incorporated in a skin layer such as layer 316 or one of layers 416 or 418 would be a slip agent. A slip agent will make the film easier to handle during the manufacturing process. Typically a slip agent would be used with a mirror film rather than a film intended to transmit a portion of the light striking it. The side including the slip agent would typically be the side intended to be laminated to a supporting substrate in order to prevent the slip agent from increasing haze associated with the reflection.

Another type of additional layer that could be used is a protective layer. Such a layer could be abrasion resistant or resistant to weathering and/or chemical action. Such coatings would be particularly useful in situations where the multilayer film is to be exposed to a harsh or corrosive environment. Examples of abrasion-resistant or hard coatings include acrylic hardcoats such as Acryloid A-11 and Paraloid K-120N, available from Rohm & Haas; urethane acrylates, such as described in US Patent No. 4,249,011 and those available from Sartomer Corp.; and urethane hardcoats such as those obtained from reacting an aliphatic polyisocyanate such as Desmodur N-3300, available from Miles, Inc. with a polyester such as Tone Polyol 0305, available from Union Carbide. Such layers could also provide protection against transmission of gases such as oxygen or carbon dioxide or water vapor through the film. Again this could be a single layer

holographic images, holographic diffusers, or other diffusing layers. Such layers could be in a hard polymer or in an adhesive

Figure 11 shows alternative multilayer film 500 having alternating layers 512 and 514 with protective layers 516, 518, and 520. Thus, multiple additional layers could be provided adjacent a single major surface of the multilayer optical stack. An example of a use for a structure of the type shown in Figure 11
5 would be one in which protective layers 516 and 518 were tear resistant structures, as described above, and layer 520 was abrasion resistant..

The foregoing has been examples of various coatings that could be applied to the exterior of a multilayer stack to alter its properties. In general, any additional layers could be added that would have different mechanical, chemical, or
10 optical properties than those of the layers of the stack itself.

What is Claimed is:

1. A multilayer layer film including an optical stack comprising layers of a semi-crystalline having an average thickness of not more than 0.5
5 microns and layers of a second polymer having an average thickness of not more than 0.5 microns wherein said optical stack has been stretched in at least one direction to at least twice that direction's unstretched dimension, said optical stack having first and second major surfaces, said film further comprising a first additional layer adhered to said first major surface, said additional layer being of a material
10 selected for its mechanical properties, said mechanical properties differing from mechanical properties of said layers of said optical stack.

2. The multilayer film of Claim 1 further comprising a second additional layer adhered.

15

3. A multilayer optical film having layers of first and second polymers, said first and second polymers differing in composition, each of said layers having a thickness of no more than 0.5 microns, said optical stack having first and second major surfaces, said first major surface having adhered thereto a first
20 tear resistant layer.

4. The multilayer optical film of Claim 3 wherein said second major surface has adhered thereto a second tear resistant layer.

25 5. The multilayer optical film of Claim 4 wherein each of said tear resistant layers has a thickness greater than 5 percent of the thickness of said optical stack.

30 6. The multilayer optical film of Claim 4 wherein each of said tear resistant layers has a thickness in the range of 5 percent to 60 percent of the thickness of said optical stack.

7. The multilayer optical film of Claim 6 wherein each of said tear resistant layers has a thickness in the range of 30 percent to 50 percent of the thickness of said optical stack.

5

8. The multilayer optical film of Claim 5 wherein said tear resistant layers have a composition that is substantially the same as the composition of said second polymers.

10

9. The multilayer optical film of Claim 8 wherein said first polymer is polyethylene naphthalate and said second polymer is a copolyester comprising naphthalate and terephthalate units.

15

10. The multilayer optical film of Claim 3 wherein said first polymer has a positive stress coefficient.

20

11. A multilayer layer film including an optical stack comprising layers of a semi-crystalline having an average thickness of not more than 0.5 microns and layers of a second polymer having an average thickness of not more than 0.5 microns wherein said optical stack has been stretched in at least one direction to at least twice that direction's unstretched dimension, said optical stack having first and second major surfaces, said film further comprising a first additional layer adhered to said first major surface, said additional layer being of a material selected for its chemical properties, said chemical properties differing from chemical properties of said layers of said optical stack.

25

12. The multilayer film of Claim 11 further comprising a second

30

13. A multilayer layer film including an optical stack comprising layers of a semi-crystalline having an average thickness of not more than 0.5

microns and layers of a second polymer having an average thickness of not more than 0.5 microns wherein said optical stack has been stretched in at least one direction to at least twice that direction's unstretched dimension, said optical stack having first and second major surfaces, said film further comprising a first additional
5 layer adhered to said first major surface, said additional layer being of a material selected for its optical properties, said optical properties differing from optical properties of said layers of said optical stack.

14. The multilayer film of Claim 13 further comprising a second
10 additional layer adhered.

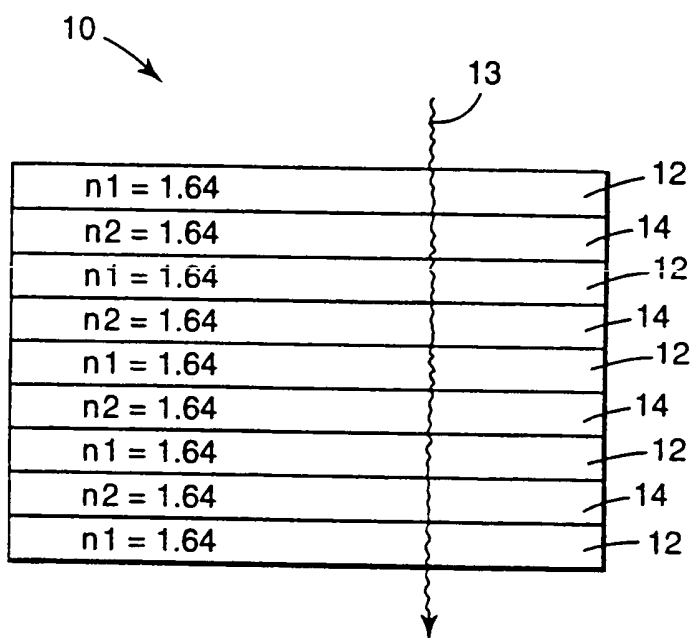


FIG. 1a

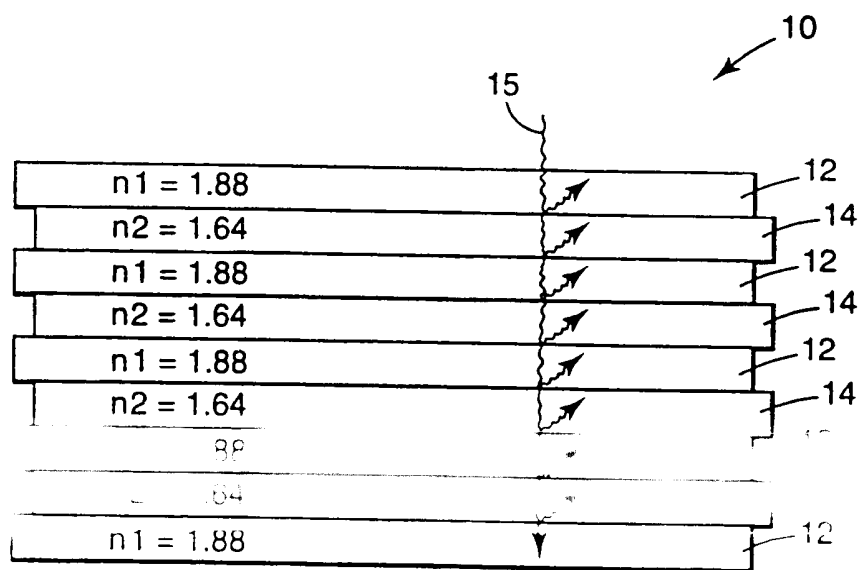


FIG. 1b

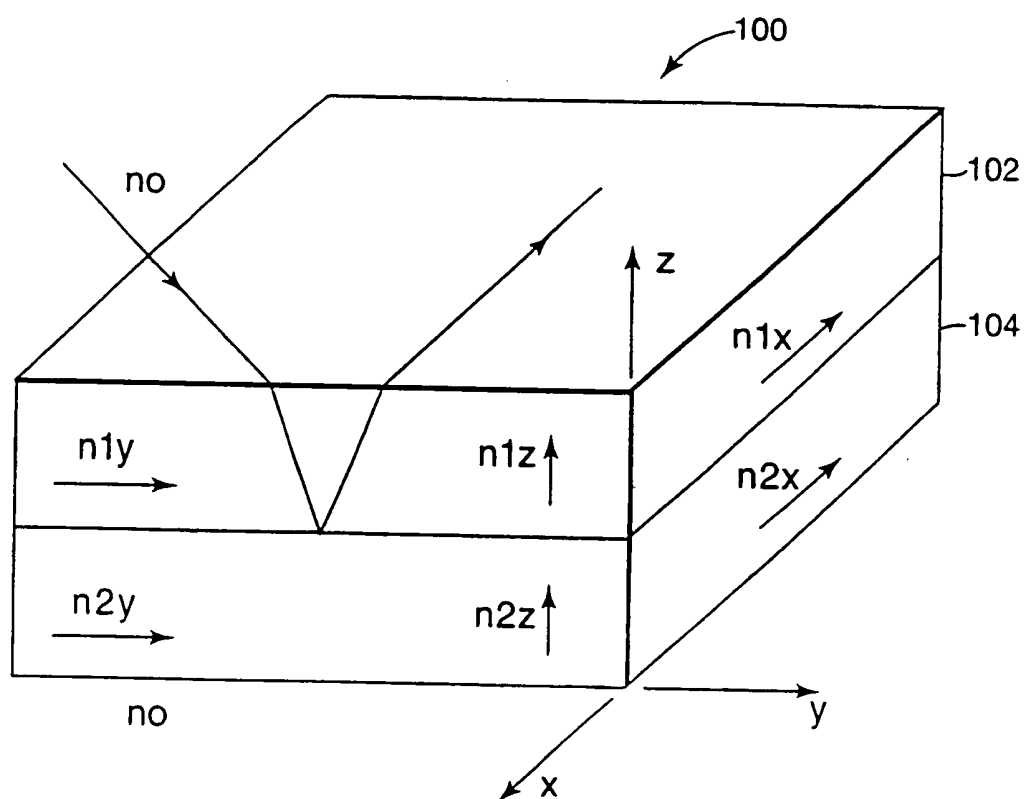


FIG. 2

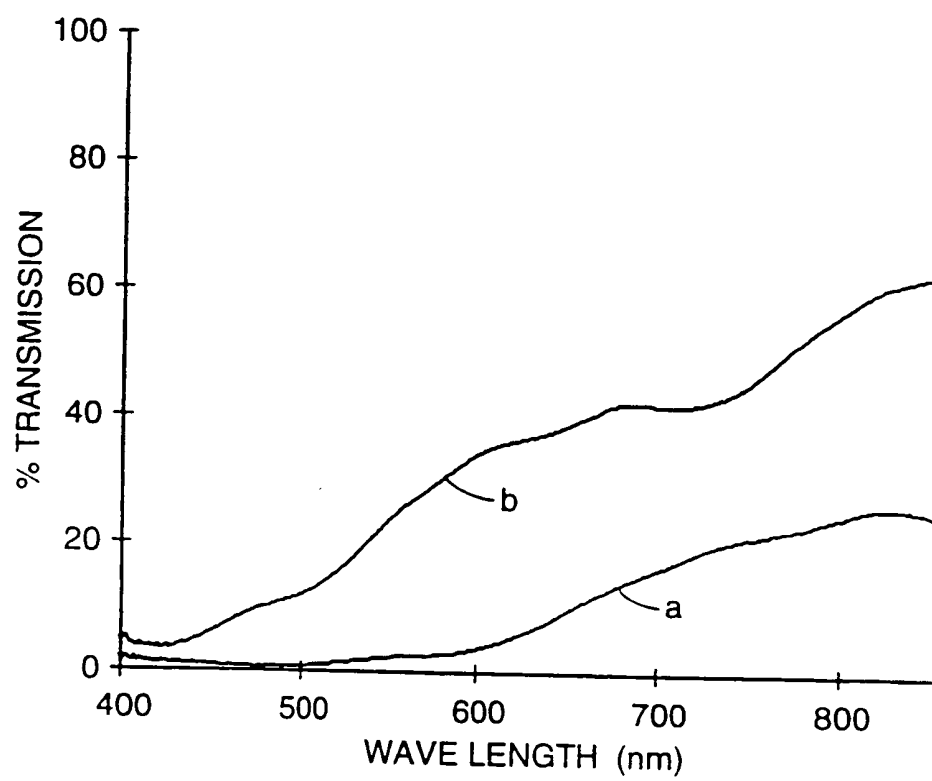


FIG.


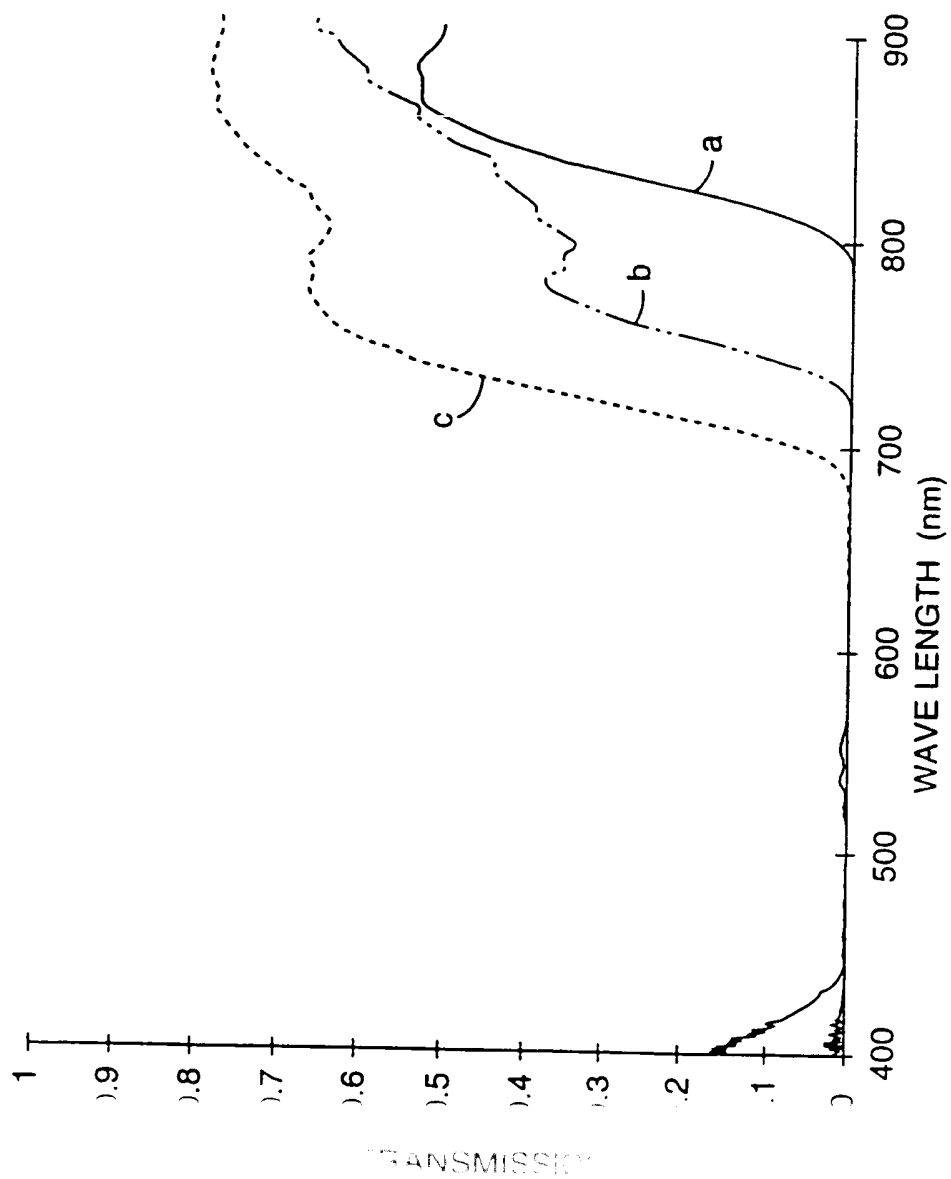


FIG. 4

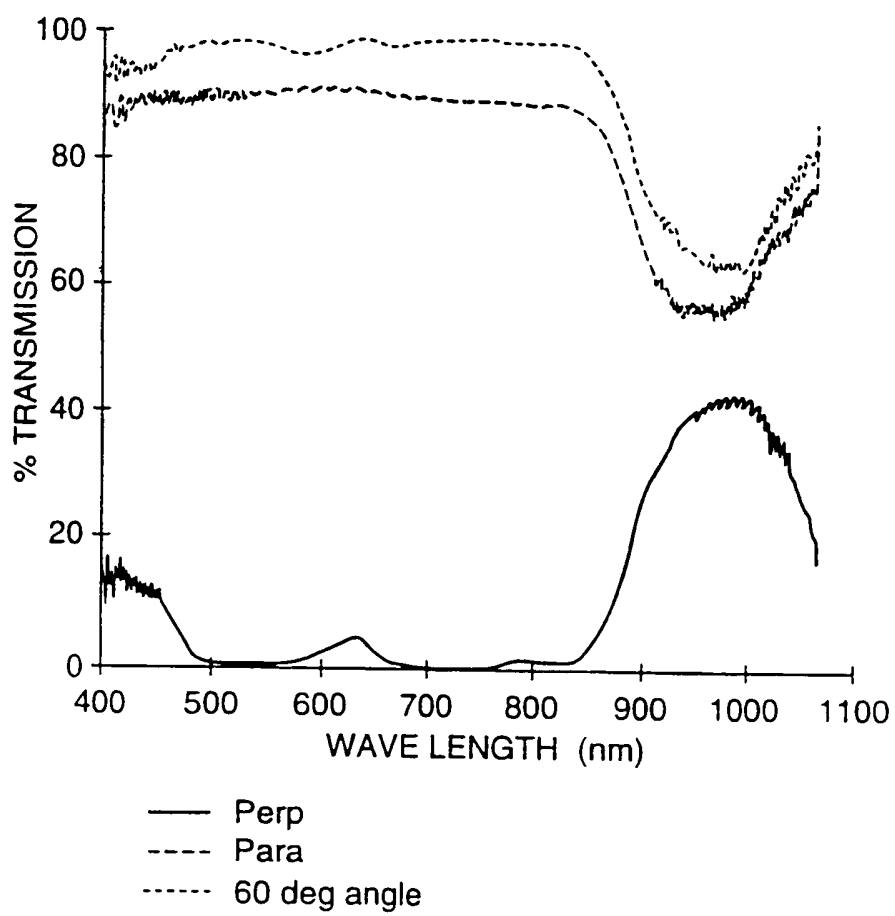

6/10

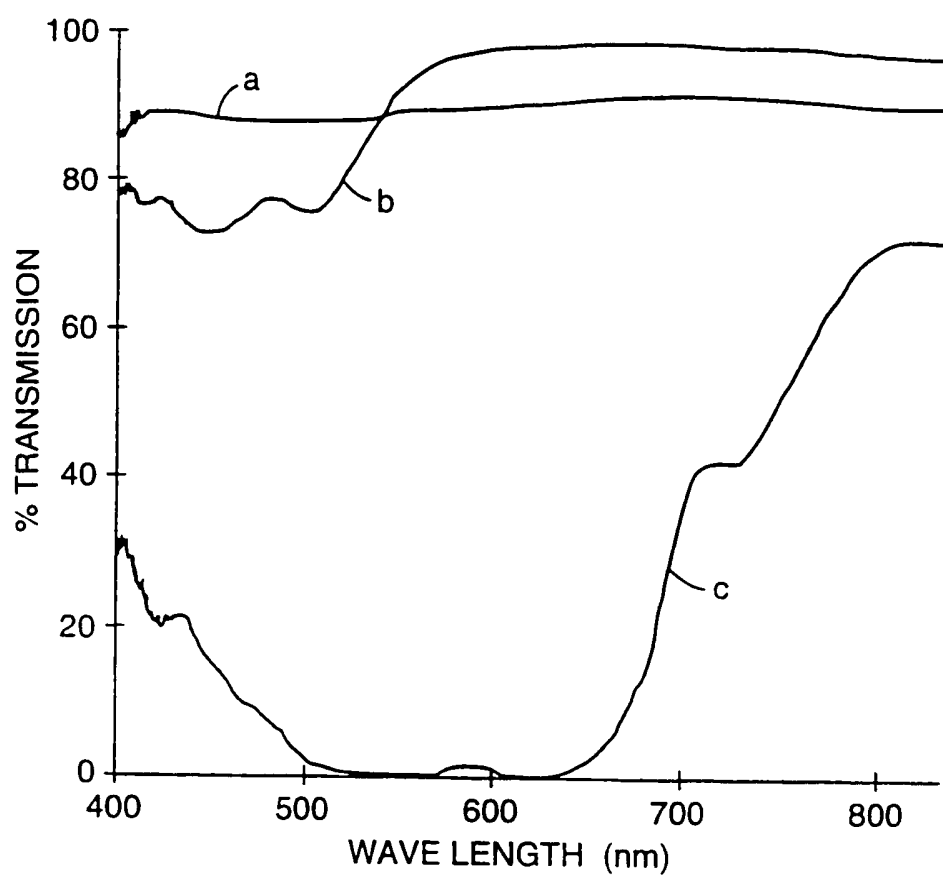


FIG. 1

7/10

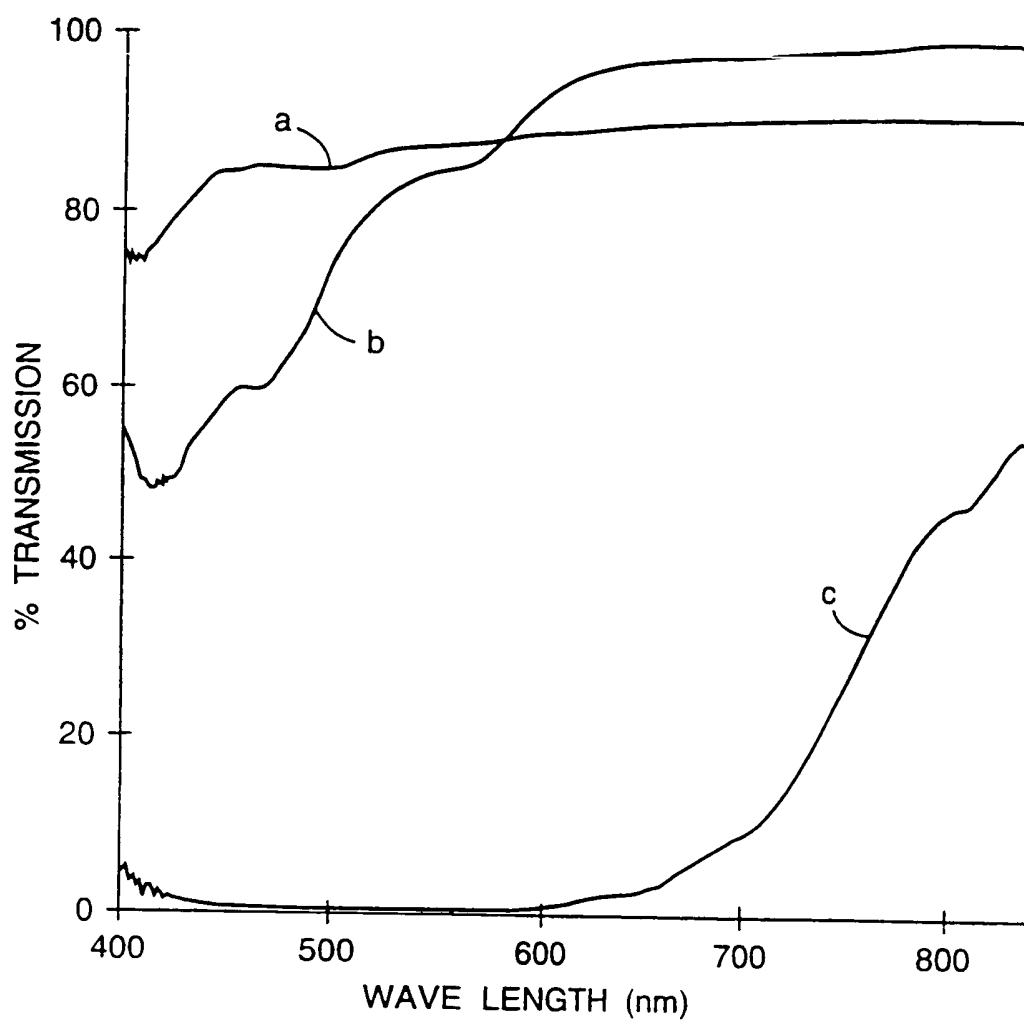


FIG.

8/10

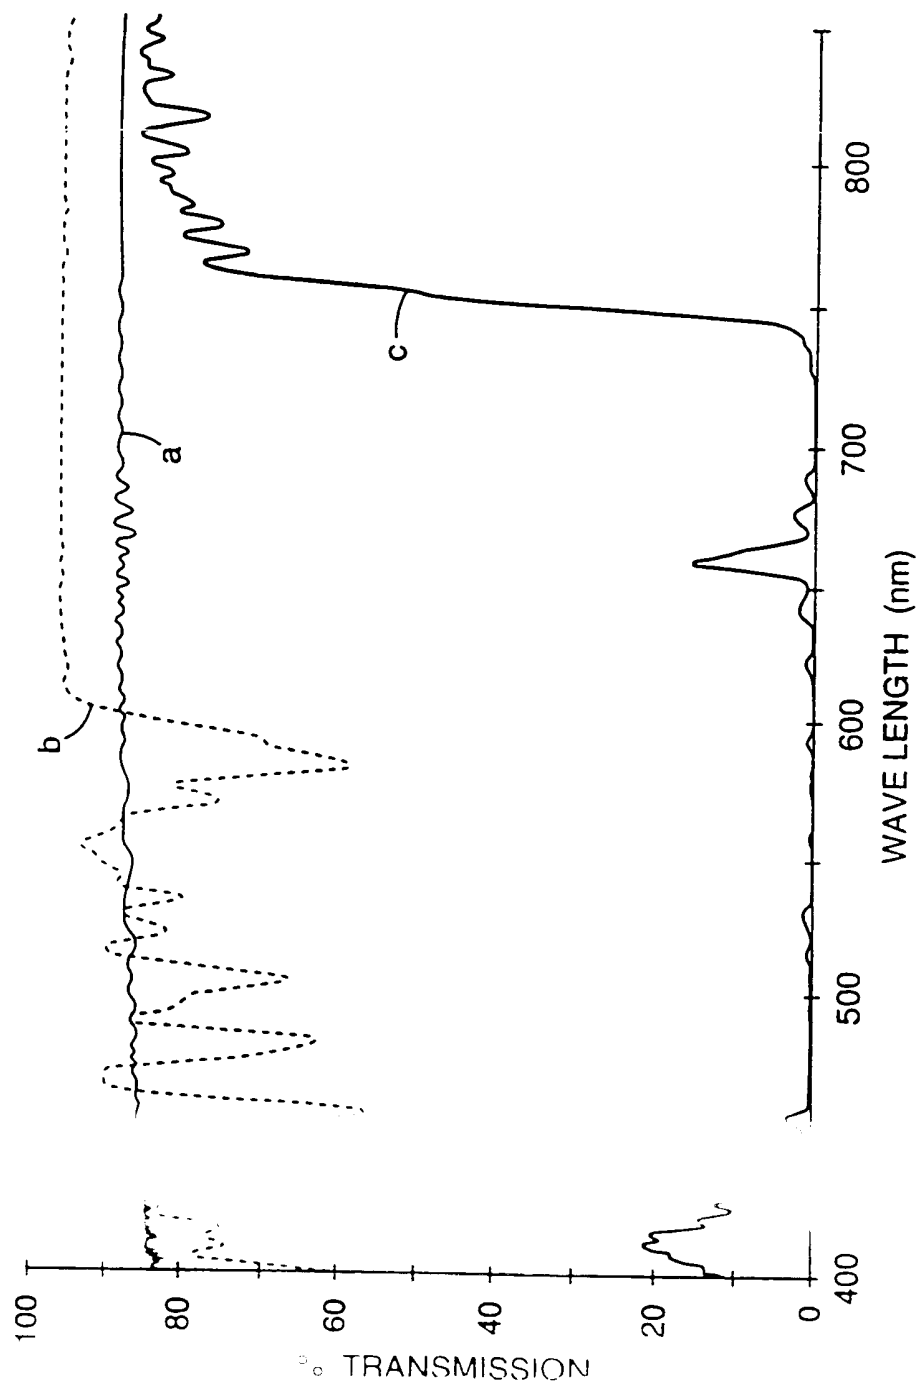


FIG. 8

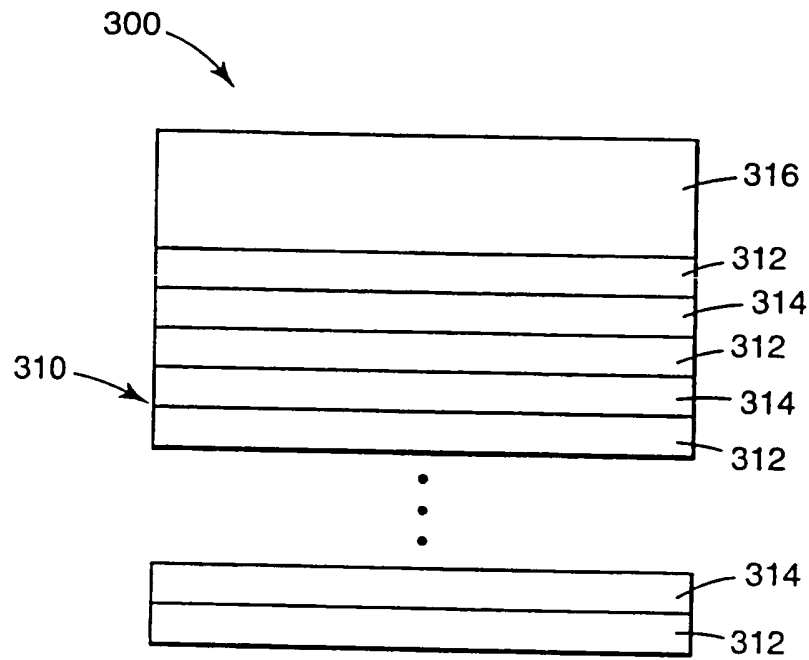


FIG. 9


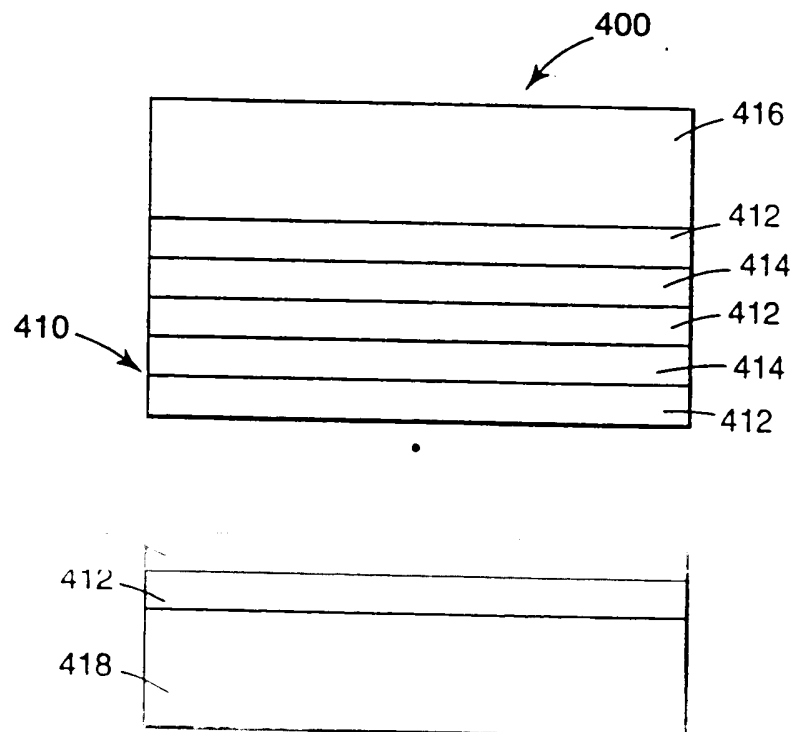


FIG. 10

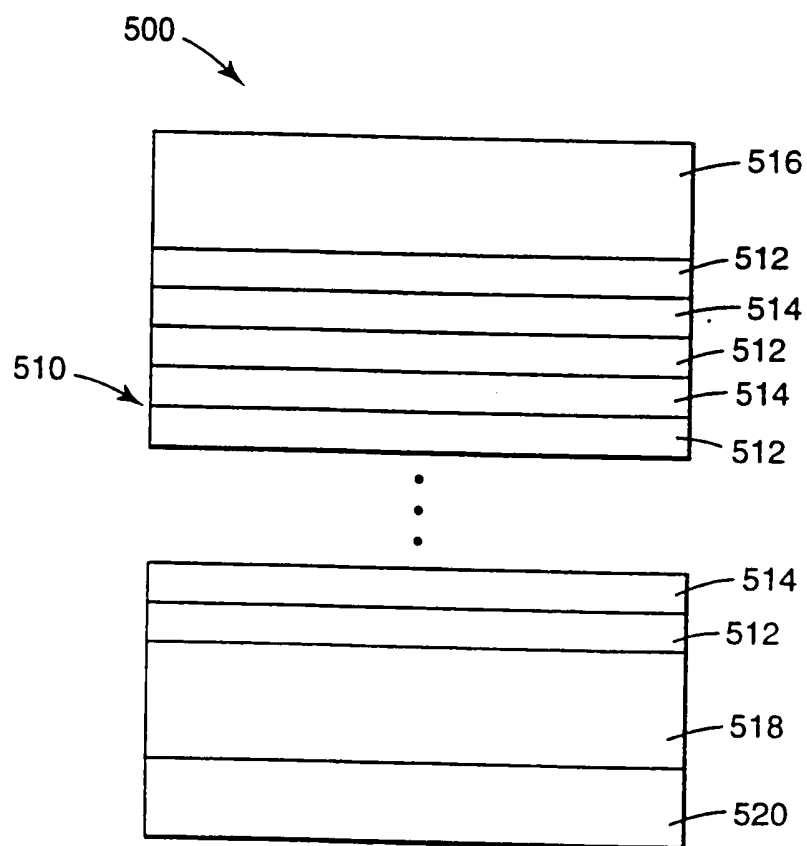

INTERNATIONAL SEARCH REPORT

International Application No.

PC1/US 96/10691

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 B32B27/36 B32B7/02 G02B5/08 G02B5/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B32B G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP,A,0 404 463 (DOW CHEM CO) 27 December 1990 see page 3, line 45 - line 51; claims 12,14,15; examples 1-6,8,9 see page 4, line 37 - line 47 see page 8, line 25 - line 33 ---	1,2 10,11,13
A		
X	EP,A,0 488 544 (DOW CHEM CO) 3 June 1992 see column 2, line 32 - line 56; claims 4,5,7,10,14,19 ---	1,2
A	see column 3, line 12 - line 50 ---	9,10
P,Y	WO,A,95 17303 (MINNESOTA MINING & MFG CO) 29 June 1995 see page 14, line 19 - line 25 see page 28, line 30 - page 30, line 26; claims 1-3,9-11,14,16,17,21 ---	1-14
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

Document referring to the state of the art prior to the international filing date

Document published prior to the international filing date but after the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other published documents, such combination being indicated in the document as being the art

Document mentioned in the same patent family

Date of the actual completion of the international search

6 November 1996

Date of mailing of the international search report

14. 11. 96

Name and mailing address of the ISA

European Patent Office, P.O. 8118 Patentlaan 1
 NL - 2280 HV Rijswijk
 Tel: (+31 70) 340 2040, Telex: 513 1000
 Fax: (+31 70) 340 1016

Authorized officer

Kanetakis, J.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/10691

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0404463	27-12-90	AT-T- 139035	15-06-96
		AU-B- 622812	16-04-92
		AU-A- 5758790	03-01-91
		CA-A- 2019272	20-12-90
		CN-A,B 1048191	02-01-91
		DE-D- 69027254	11-07-96
		JP-A- 3041401	21-02-91
		NO-B- 178723	12-02-96
		US-A- 5122905	16-06-92
		US-A- 5122906	16-06-92
		US-A- 5486949	23-01-96
		US-A- 5262894	16-11-93
		US-A- 5278694	11-01-94
EP-A-488544	03-06-92	US-A- 5486949	23-01-96
		CA-A- 2056153	27-05-92
WO-A-9517303	29-06-95	AU-A- 1866395	10-07-95
		EP-A- 0735952	09-10-96
WO-A-9410589	11-05-94	AU-A- 5322594	24-05-94
		CN-A- 1088511	29-06-94
		EP-A- 0666993	16-08-95
		JP-T- 8503312	09-04-96
		US-A- 5448404	05-09-95
		US-A- 5568316	22-10-96

Internal Application No
PCT/US 96/10691

Internal Application No
PCT/US 96/10691

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>W0,A,94 10589 (DOW CHEM CO) 11 May 1994 see page 7, line 12 - line 27; claims 1,19,20 see page 12, line 20 - page 13, line 23 see page 14, line 4 - line 20 see page 5, line 31 - page 6, line 27 see page 8, line 7 - line 15 -----</p>	1-14

Y

WO,A,94 10589 (DOW CHEM CO) 11 May 1994
see page 7, line 12 - line 27; claims
1,19,20
see page 12, line 20 - page 13, line 23
see page 14, line 4 - line 20
see page 5, line 31 - page 6, line 27
see page 8, line 7 - line 15

1-14